



LUXURY SPC FLOORING

HIGH QUALITY, QUICK DELIVERY

VRP FLOORING



ALPINE + SERIES

9 X 48" **5.5MM** **22MIL** **1.5MM**
THICKNESS WEARLAYER PADDING

SQFT / BOX	➤ 24.49 SQFT
BOXES / PALLET	➤ 56
SQFT / PALLET	➤ 1,371.44 SQFT
PLANKS / BOX	➤ 8 PLANKS
WEIGHT / PALLET	➤ 2,230 LBS
WEIGHT / BOX	➤ 40.1 LBS

► PACKAGING SPECIFICATIONS



ALPINE 2.2 SERIES

7 X 48" **5MM** **22MIL** **1MM**
THICKNESS WEARLAYER PADDING

SQFT / BOX	➤ 23.95 SQFT
BOXES / PALLET	➤ 55
SQFT / PALLET	➤ 1,317.25 SQFT
PLANKS / BOX	➤ 10 PLANKS
WEIGHT / PALLET	➤ 2,190 LBS
WEIGHT / BOX	➤ 38.5 LBS

► PACKAGING SPECIFICATIONS



MONTCLAIR SERIES

7 X 48" **6.5MM** **22MIL** **1.5MM**
THICKNESS WEARLAYER PADDING

SQFT / BOX	➤ 19.16 SQFT
BOXES / PALLET	➤ 55
SQFT / PALLET	➤ 1,053.8 SQFT
PLANKS / BOX	➤ 8 PLANKS
WEIGHT / PALLET	➤ 2,200 LBS
WEIGHT / BOX	➤ 39 LBS

► PACKAGING SPECIFICATIONS



HARPER SERIES

9 X 48" **6.5MM** **22MIL** **1.5MM**
THICKNESS WEARLAYER PADDING

SQFT / BOX	➤ 21.45 SQFT
BOXES / PALLET	➤ 48
SQFT / PALLET	➤ 1,029.6 SQFT
PLANKS / BOX	➤ 7 PLANKS
WEIGHT / PALLET	➤ 2,200 LBS
WEIGHT / BOX	➤ 46 LBS

NOT YOUR AVERAGE SPC!

BRING THE BEAUTY OF
NATURE INDOORS WITH
WOOD-LIKE SURFACES THAT
EXCEED EXPECTATIONS.

TECHNICALLY ADVANCED
SUPERION WEAR LAYER.

SUPER MATTE FINISH.

75% STONE POWDER FLOORING.

ADVANCED INDUSTRIAL PROCESS

This advanced wear layer is designed specifically for flooring products like SPC and laminate. Engineered with a unique blend of minerals and polymers, it delivers exceptional protection against daily wear, scratches, stains, dents, pet accidents, kitchen spills, bacteria growth, and UV exposure. Other flooring options do not offer this level of durability or defense.


Choose flooring with this high-performance wear layer for superior protection, a reliable warranty, and lasting peace of mind.

THE

TOUGHEST

WEAR LAYER™

SUPERION™
WEAR LAYER

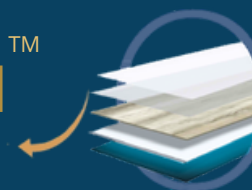



VERSATILE AND DURABLE 4 WAY UNICLIC SOLUTIONS.

We use Unilin's Uniclic locking system on all 4 sides - This ensures that floors stay locked in after install. Making sure that you get called back to install new floors, and not fix gaps and opened joints. This tap lock system as proved to be the go to locking system for environments that experience temperature fluctuations.

WHILE DROP LOCK SYSTEMS OPEN UP DURING WINTERS AND SUMMER SEASONAL CHANGES, 4 WAY UNICLIC STAYS PUT.





- 75% STONE POWDER COMPOSITE.
- FREE OF ANY RECYCLED PLASTICS, AND PHTHALATES.
- 100% VIRGIN INGREDIENTS.
- LIFETIME RESIDENTAIL WARRANTY.
- SAFE FOR PETS, AND KIDS.



7X48"

ALPINE 2.2 SERIES

7 X 48" **5MM 22MIL 1MM**
THICKNESS WEARLAYER PADDING

1,317.25SQFT/ PALLET
55 BOXES/ PALLET
23.95 SQFT/ BOX

MONTCLAIR SERIES

7 X 48" **6.5MM 22MIL 1.5MM**
THICKNESS WEARLAYER PADDING

1,053.6 SQFT/ PALLET
55 BOXES/ PALLET
19.16 SQFT/ BOX



9X48"

ALPINE + SERIES

9 X 48" **5.5MM 22MIL 1.5MM**
THICKNESS WEARLAYER PADDING

1,371.44 SQFT/ PALLET
56 BOXES/ PALLET
24.49 SQFT/ BOX

HARPER SERIES

9 X 48" **6.5MM 22MIL 1.5MM**
THICKNESS WEARLAYER PADDING

1,029.6 SQFT/ PALLET
48 BOXES/ PALLET
21.45 SQFT/ BOX





Hyper-Realistic Detailed Wood Pattern

7 X 48" **5MM 22MIL 1MM**
THICKNESS WEARLAYER PADDING



NAPALI OAK



9 X 48" **5.5MM** **22MIL** **1.5MM**
THICKNESS WEARLAYER PADDING



DURBAN OAK



Hyper-Realistic Detailed Wood Pattern

7 X 48" **6.5MM** **22MIL** **1.5MM**
THICKNESS WEARLAYER PADDING

7 X 48" **5MM** **22MIL** **1MM**
THICKNESS WEARLAYER PADDING



NICOYA FIR




7 X 48" **6.5MM** **22MIL** **1.5MM**
THICKNESS WEARLAYER PADDING

7 X 48" **5MM** **22MIL** **1MM**
THICKNESS WEARLAYER PADDING



LAPLAND OAK

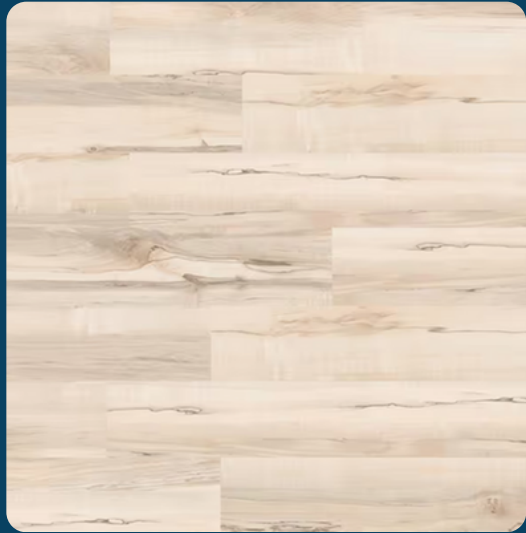

9 X 48" **6.5MM** **22MIL** **1.5MM**
THICKNESS WEARLAYER PADDING



FOXSHIRE MAPLE



Hyper-Realistic Detailed Wood Pattern

7 X 48" **5MM 22MIL 1MM**
THICKNESS WEARLAYER PADDING



JANEIRO OAK



7 X 48" **6.5MM 22MIL 1.5MM**
THICKNESS WEARLAYER PADDING



IMPERIAL OAK



Hyper-Realistic Detailed Wood Pattern

7 X 48" **6.5MM** **22MIL** **1.5MM**
THICKNESS WEARLAYER PADDING

7 X 48" **5MM** **22MIL** **1MM**
THICKNESS WEARLAYER PADDING



PRESTON OAK



7 X 48" **5MM** **22MIL** **1MM**
THICKNESS WEARLAYER PADDING



BURLHAVEN / SAHARA OAK




7 X 48" 6.5MM 22MIL 1.5MM
THICKNESS WEARLAYER PADDING

7 X 48" 5MM 22MIL 1MM
THICKNESS WEARLAYER PADDING




BARRY OAK

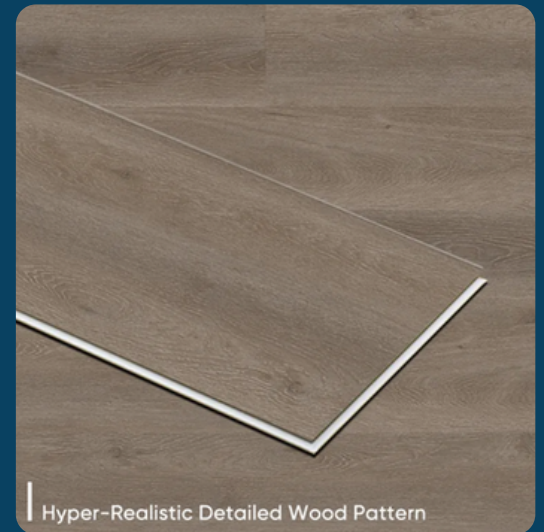

9 X 48" **5.5MM** **22MIL** **1.5MM**
THICKNESS WEARLAYER PADDING



STONEHAVEN OAK

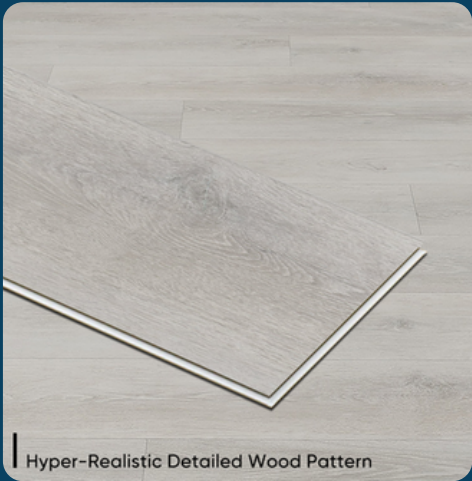

Hyper-Realistic Detailed Wood Pattern

7 X 48" **6.5MM** **22MIL** **1.5MM**
THICKNESS WEARLAYER PADDING

7 X 48" **5MM** **22MIL** **1MM**
THICKNESS WEARLAYER PADDING



RIVAWOOD OAK



Hyper-Realistic Detailed Wood Pattern

7 X 48"

6.5MM
THICKNESS

22MIL
WEARLAYER

1.5MM
PADDING



DUPONTE FIR



Hyper-Realistic Detailed Wood Pattern

9 X 48" **5.5MM** **22MIL** **1.5MM**
THICKNESS WEARLAYER PADDING



DURBAN OAK



7 X 48" **6.5MM** **22MIL** **1.5MM**
THICKNESS WEARLAYER PADDING



FREEMONT FIR



Hyper-Realistic Detailed Wood Pattern

7 X 48" **6.5MM** **22MIL** **1.5MM**
 THICKNESS WEARLAYER PADDING

7 X 48" **5MM** **22MIL** **1MM**
 THICKNESS WEARLAYER PADDING



PALERMO VALLEY




Hyper-Realistic Detailed Wood Pattern

7 X 48" 6.5MM 22MIL 1.5MM
THICKNESS WEARLAYER PADDING

7 X 48" 5MM 22MIL 1MM
THICKNESS WEARLAYER PADDING



WOODBURY OAK

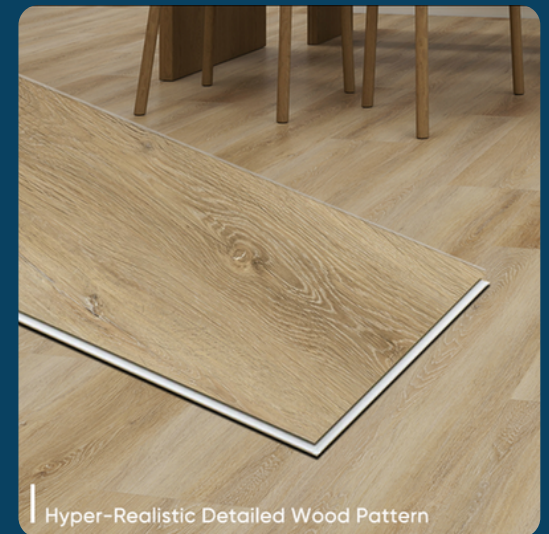

9 X 48" **6.5MM** **22MIL** **1.5MM**
THICKNESS WEARLAYER PADDING



KINSHIRE ABBEY



9 X 48" **6.5MM** **22MIL** **1.5MM**
THICKNESS WEARLAYER PADDING




CARMEL OAK



9 X 48" **6.5MM** **22MIL** **1.5MM**
THICKNESS WEARLAYER PADDING



STELLERNOVA OAK

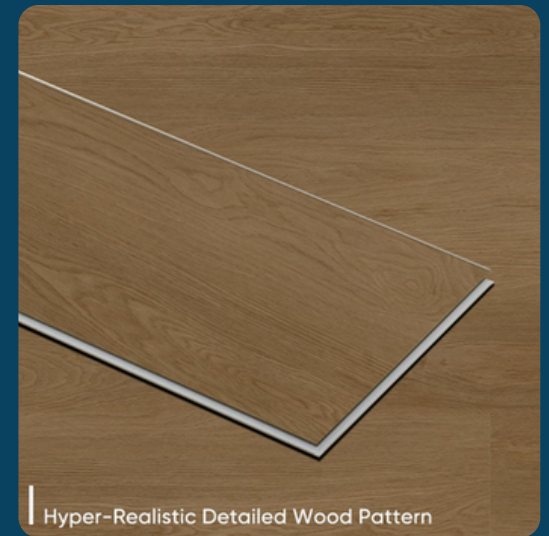


Hyper-Realistic Detailed Wood Pattern

9 X 48" **6.5MM** **22MIL** **1.5MM**
THICKNESS WEARLAYER PADDING




STRATFORD OAK

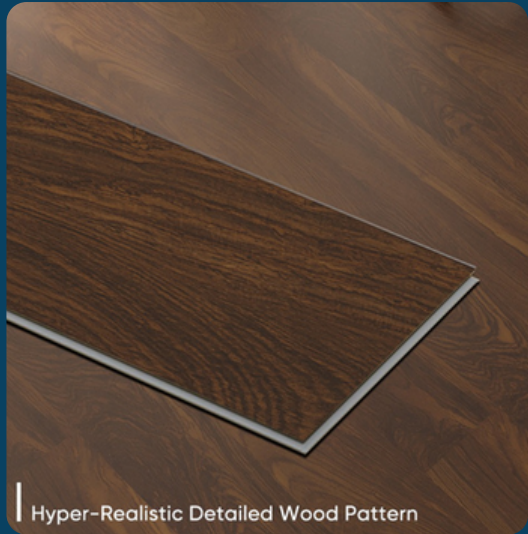

9 X 48" **6.5MM** **22MIL** **1.5MM**
THICKNESS WEARLAYER PADDING



CRIMSON OAK

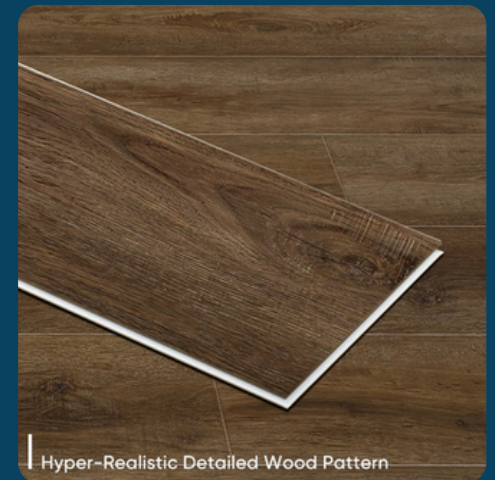

Hyper-Realistic Detailed Wood Pattern

9 X 48" **6.5MM 22MIL 1.5MM**
THICKNESS WEARLAYER PADDING

7 X 48" **6.5MM 22MIL 1.5MM**
THICKNESS WEARLAYER PADDING

7 X 48" **5MM 22MIL 1MM**
THICKNESS WEARLAYER PADDING




BRUNO OAK



PRODUCT COMPOSITION

Stone Polymer composite (SPC) also known as rigid core flooring features a core that comprises mainly of limestone & PVC which results in its adaptability & strength.

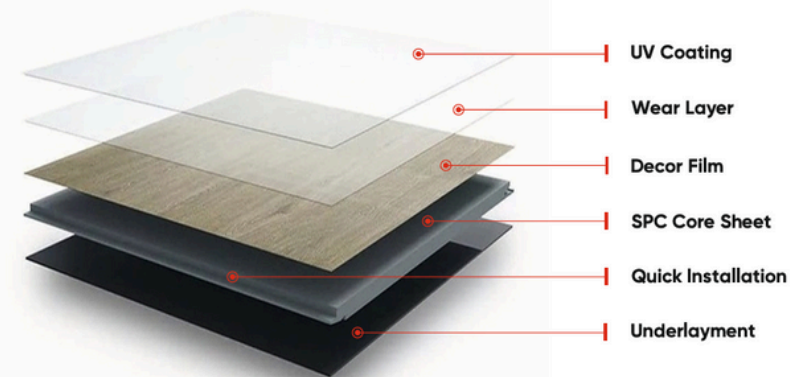

The technical specifications of SPC (Stone Polymer Composite) flooring are exceptional, combining endurance and creativity. Its strong core structure is made of a unique composite product which ensures exceptional dimensional stability. This material is resistant to water, scratches, stains and fire making it an excellent flooring alternative for a variety of conditions.

Technical

Performances

Test Parameters	Standard	Specification / Criteria	Result
Dimension Stability	ISO 23999	< 0.10% < 1 mm > 25000	Pass
Curling Micro scratch resistant Residual	ISO 23999	Cycle (4N Load) < 0.10mm >	Pass
Indentation Shore D hardness Scratch	EN 16094	15 to < 70 HD > 6 N AC4 (> 4000 cycle) > 50 N / 50 mm	Pass
Resistant Abrasion	ACTME 1914	> 250 N / 100 mm 1.95 to	Pass
Resistant Pill strength	ASTM D 2240	2.05 g/cm ² 25000 Cycle (90 kg load) 1600 mm Height	Pass
Locking Strength	EN 13329 EN	(320 gm load)	Pass
Density Castor Chair test Large Ball Impact test	ISO 24345		Pass
	ISO 24334		Pass
	ASTM D 792		Pass
	ISO 4918 EN 438		Pass





RESIDENTIAL

LIFETIME

WARRANTY